
MIGUTEC

ININT COVERS FOR EXPANSION ININTS

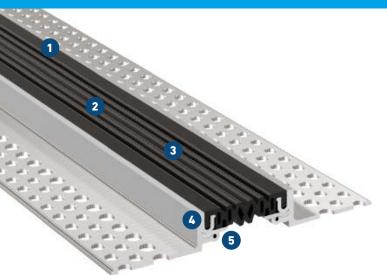

- 1 Flexible high quality elastomeric insert
 Hard wearing, temperature resistant (-30°C to +120°C),
 replaceable
- Insert and horizontal support plates replaceable with series FP 65 and FP 105
- Multi directional movement
- High load capacity due to sturdy construction
 Solid aluminium brackets
- Duick and easy installation
 Positive connection of production lengths by means of connection pieces

Expansion joint cover	Joint width	Total movement	Visible width	Joint width total	Joint height	Load bearing capacity	Load bearing capacity*
						~~ •	~ -∙
	bf max [mm]	Δbf [mm]	b _s [mm]	bt [mm]	h [mm]	[kN]	[kN]
FP 85/20	75	30 (±15)	82	222	20	30	300
FP 85/30	75	30 (±15)	82	222	30	30	300
FP 85/50	75	30 (±15)	82	222	50	30	300

No continuous use

Larger installation heights on request.

For installation in asphalt, please ask for our technical advice.

Production length: 4 m

Standard colors: black, grey, beige

